Part 2-D) Installation with Tsukayu adaptive brackets & plates assembly kit

(i) Honda VTX 1300 R/S/T

Two hardware kits are needed: a) Q-TSU801p adaptive brackets kit; b) Q-TSU801 bracket plates assembly kit

Fig. 2-D-(i)-1

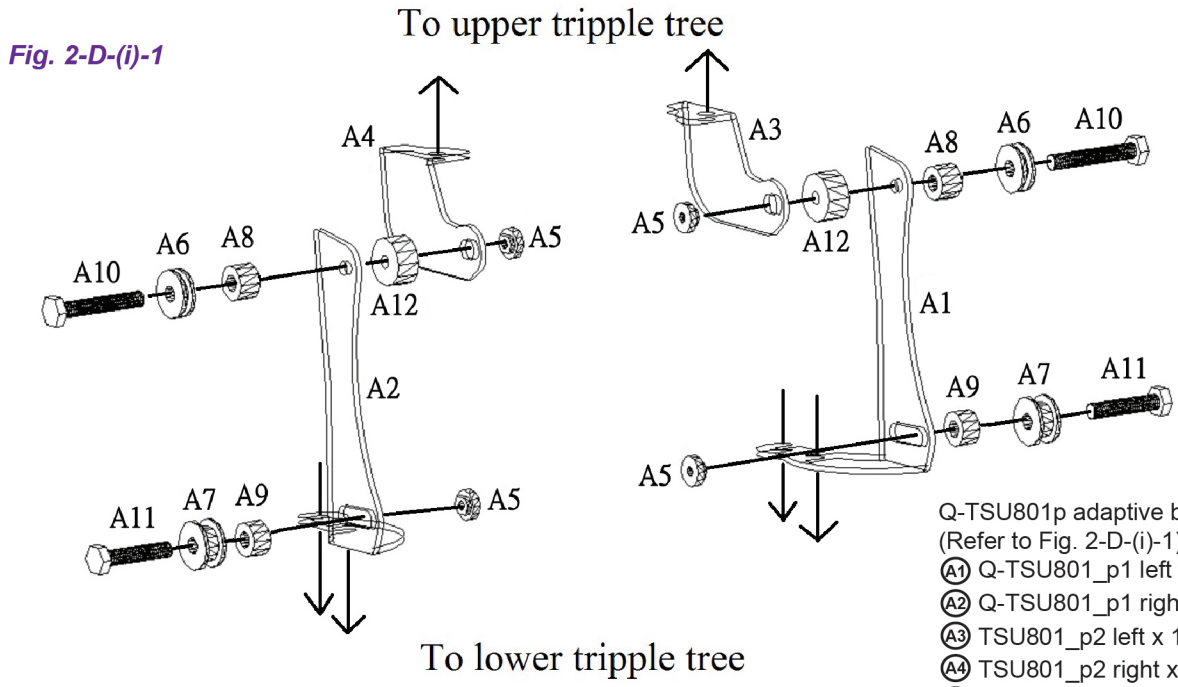

Fig. 2-D-(i)-2

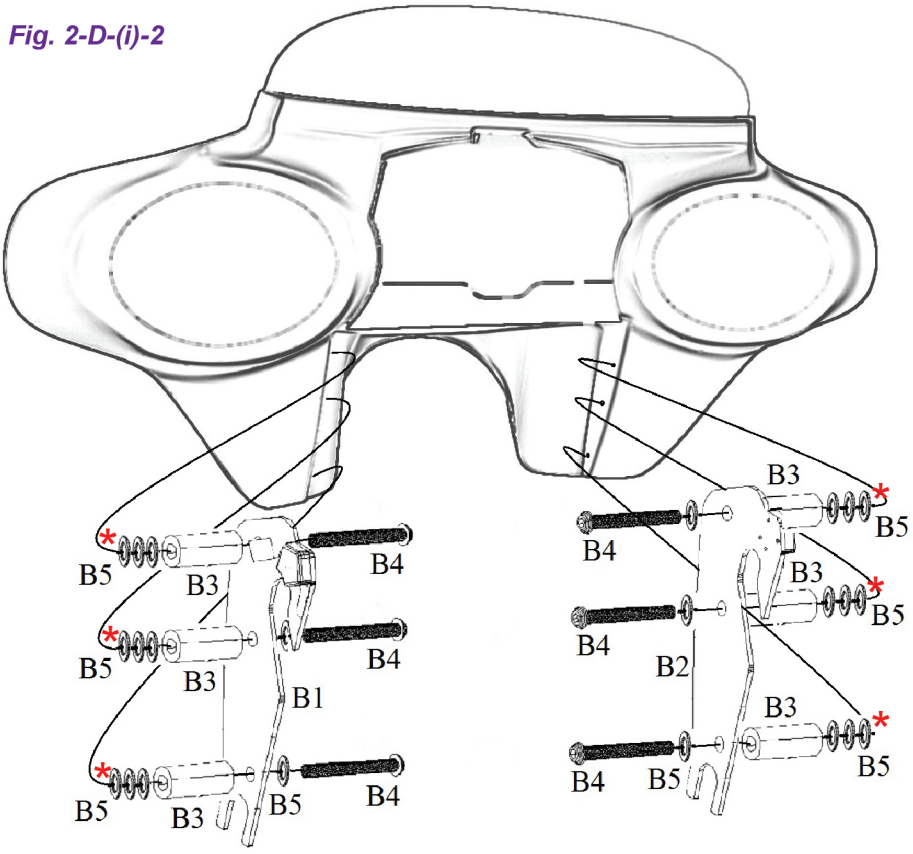

Q-TSU801p adaptive brackets kit includes:
(Refer to Fig. 2-D-(i)-1):

- (A1) Q-TSU801_p1 left x 1pc
- (A2) Q-TSU801_p1 right x 1pc
- (A3) TSU801_p2 left x 1pc
- (A4) TSU801_p2 right x 1pc
- (A5) M8-MS_NUT x 4pcs
- (A6) RK-7.6mm x 2pcs
- (A7) RK-12.6mm x 2pcs
- (A8) spacer 12mm(L) x8.5mm(I) x18mm(O) x 2pcs
- (A9) spacer 10mm(L) x8.5mm(I) x18mm(O) x 2pcs
- (A10) Bolt M8 x 50mm (hex head) x 2pcs
- (A11) Bolt M8 x 40mm (hex head) x 2pcs
- (A12) spacer 12.8mm(L) x8.5mm(I) x25mm(O) x 2pcs

Q-TSU801 bracket plates kit includes:
(Refer to Fig. 2-D-(i)-1 and 2-D-(i)-2)

- (B1) Q-TSU801 left x 1pc
- (B2) Q-TSU801 right x 1pc
- (B3) spacer 43mm(L) x8.5mm(I) x18mm(O) x 6pcs
- (B4) Bolt M8 x 60mm (round head) x 6pcs
- (B5) additional M8 washers (use if necessary)

*Note: Refer to Step 3

1. Cover gas tank and front fender with protective material.

2. Install the Q-TSU801p bracket assembly as shown in Fig.2-D-(i)-1, the turn signal bar should be removed temporarily (turn signal bar is not shown in the figure). Measure the distance between the slots on left and right quick release latches, this distance will be used to adjust the distance between the bracket plates on fairing, you need to measure it as accurate as possible, we suggest measuring in mm.

*3. Install the mounting plates assembly as shown in Fig.2-D-(i)-2. Add M8 washers if the distance of the two mounting plates doesn't perfectly match the distance between the two slots of Q-TSU801p. The spacers provided are close to what you need, but you may still need to add washers until they perfectly match, make sure you use same number of spacers and washers for all holes. Don't mix up Left and Right bracket plates, the latches come with the bracket plates. Try to put the fairing on, normally you will need to modify the number of washers several times until they match.

4. Now put the fairing on, you may need a helper for doing this step easier. Make sure the bracket plates are tightened securely. Latch the both side bracket plates securely. Tighten all the bolts on the fairing and all bolts on the whole mounting system.

Copyright © Tsukayu - All rights reserved