Part 2-D) Installation with Tsukayu adaptive brackets & plates assembly kit

(vi) Suzuki C50, C50T and volusia 800 (*C50T needs additional turn signal relocation kit)

Two hardware kits are needed: a) Q-TSU806P adaptive brackets kit; b) Q-TSU806 bracket plates assembly kit

Fig. 2-D-(vi)-1

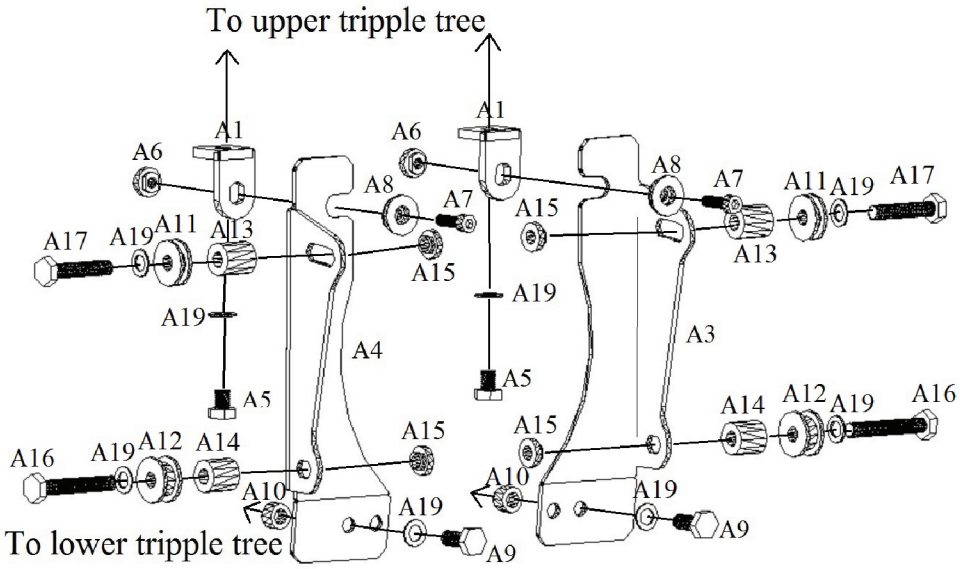

Q-TSU806P_ver2 adaptive brackets kit includes:
A1)Q-TSU806-P1_ver2 x 2pcs
A2)Q-TSU806P-P3 X 2 pcs
A3)Q-TSU806P-P2_ver2 left x 1pcs
A4)Q-TSU806P-P2_ver2 right x 1pcs
A5)Bolt M8x10mm (HEX Head) x 2pcs
A6)MS_NUT x 2pcs
A7)Bolt M6x20(Cylinder Head) x2pcs
A8)MS1_ver3 x 2pcs
A9)Bolt M8x 20mm(HEX Head) x 2pcs
A10)Spacer 8mm(L), 8.5mm(I), 14mm(O) x 2pcs
A11)RK Spacer7.6mm x 2
A12)RK Spacer12.6mm x 2
A13)Spacer 22mm(L), 8.5mm(I), 18mm(O)x2pcs
A14)Spacer 19mm(L), 8.5mm(I), 18mm(O)x2pcs
A15)M8-MS_NUT (M8) x 4pcs
A16)Bolt M8x50mm (HEX Head) x 2pcs
A17)Bolt M8x40mm (HEX Head) x 2pcs
A18)M8 Nuts x 2pcs
A19)M8 washer x 20pcs

Fig. 2-D-(vi)-2

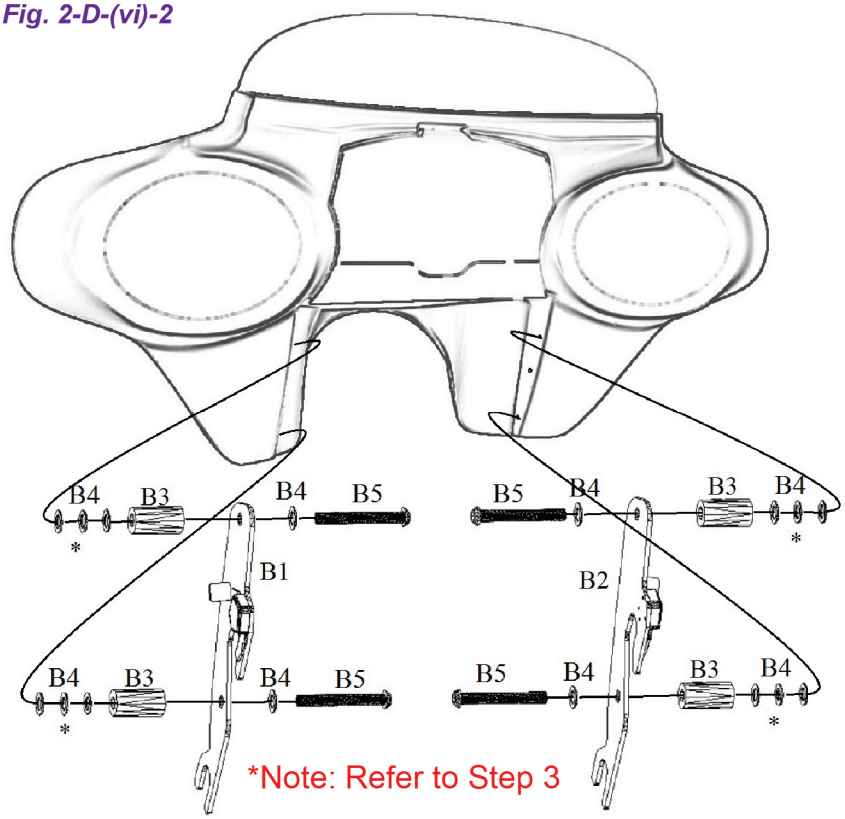

Fig. 2-D-(vi)-3



TSU806 bracket plates kit includes
B1)Q-TSU806 left x 1pcs
B2)Q-TSU806 right x 1pcs
B3)Spacer 34mm(L), 8.5mm(I), 18mm(O)) x 4pcs
B4)M8 Washer x 40 pcs
B5)Bolt M8x50 (Round Head) x 4pcs

*(add washers if necessary)

1. Cover gas tank and front fender with protective material.

2. Install the Q-TSU806p bracket assembly as shown in Fig.2-D-(vi)-1, the turn signal bar should be removed temporarily (turn signal bar is not shown in the figure). Measure the distance between the slots on left and right quick release latches, this distance will be used to adjust the distance between the bracket plates on fairing, you need to measure it as accurate as possible, we suggest measuring in mm.

*3. Install the mounting plates assembly as shown in Fig.2-D-(vi)-2. Add M8 washers if the distance of the two mounting plates doesn't perfectly match the distance between the two slots of Q-TSU806p. The spacers provided are close to what you need, but you may still need to add washers until they perfectly match, make sure you use same number of spacers and washers for all holes. Don't mix up Left and Right bracket plates, the latches come with the bracket plates. Try to put the fairing on, normally you will need to modify the number of washers several times until they match.

4. For C50T, please refer to additional Fig.2-D-(vi)-3.

5. Now put the fairing on, you may need a helper for doing this step easier. Make sure the bracket plates are tightened securely. Latch the both side bracket plates securely. Tighten all the bolts on the fairing and all bolts on the whole mounting system.

Copyright © Tsukayu - All rights reserved